


ControlMate-2

Pressure Management System



Halma Water Management

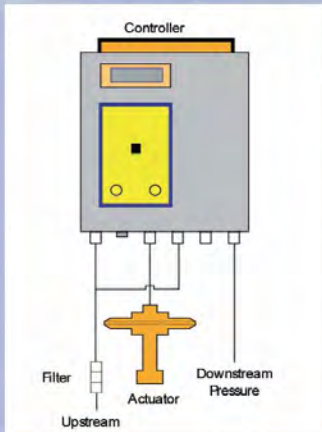

Introduction

ControlMate-2 is a low cost controller that enables the pressure into a zone to be switched between two pre-set values ("low" and "high") according to the demand (flow rate) or the time of day.

This enables the Pressure Reducing Valve (PRV) to be controlled reliably and safely.



Features

- Low cost unit
- Easy-to-use, self-contained
- Pressure management benefits realised cost-effectively, even in small zones



- Immediate water savings, often simply on day/night setting
- Time and flow modulation capability
- In-built low pressure detection and automatic response
- In-built pulse unit failure (zero flow) detection and automatic response
- Fully compatible with Hydraulic Actuator
- GSM/SMS communication available
- No external power supply requirements. Powered by an internal battery with an expected operational life of over five years



For more information call +852 3746 9033
or visit www.alliedpower.com.hk

A Halma Group Company Company is ISO 9001 Registered No.06134A

FLOW MEASUREMENT

DATA LOGGING

LEAK DETECTION

PRESSURE MANAGEMENT

ControlMate-2

Pressure Management System



Halma Water Management

PRODUCT SPECIFICATION

ControlMate-2

Display Type	2 line x 16 character backlit super-twist, fully potted
Communication & Programming	Local interface: Sealed local display, with 2 push-button switches
	Infra-red communication: Ultra-high speed 20kbaud link via I/R probe to standard RS232 port on PC
	Telemetry: Connector for multicomcommunication options: BABT-approved internal modem or multi-communication link for PAKNET, GSM, radio, etc.
	SMS/GSM communication available via ControllerCom add-on
Pressure Channel	Sensor type: Inbuilt transducers are 0-13bar and 0-17bar as standard but other ratings are available on special request. External transducer optional.
	Accuracy: Typically - 0.2% of full-scale range
	Pressure connection: Quick-fit nickelplated brass connector and push-fit 6mm connector
Flow Channel	Sensor type (pulse input): Solid state PD10, LRP, PSM or any other form of volt-free pulsed signal
	Input frequency: 0-100Hz pulse input, requiring minimum mark 4.9mS, minimum space 4.9mS
	Connector: 10-pin military specification, to IP68
Data Storage	Channels: 2 pressure + 1 flow (additional flow optional)
	Memory capacity: (120kbytes scrolling memory with storage for 60,000 values)
	Logging interval: 10s, 30s, 1min, 5min, 15min, 60min
	Sampling interval: As above but independent of logging interval
Power Source	Battery type: Fully-sealed internal lithium batteries with expected operating life of 5 years or more
Operating Environment	Temperature: -10°C to +50°C, must avoid freezing of water connections
Physical Characteristics	Construction: Stainless steel box with handle
	Dimensions: 250mm x 190mm x 70mm
	Weight: 4kg
	Protection: to IP68, fully potted
Hydraulic Actuator	Refer to separate data sheet describing this item

HWM reserves the right to vary specifications without prior notice

Allied Power Technology Ltd.

Unit B, 11/F Long To Building, 654-656 Castle Peak Road, Lai Chi Kok, Kowloon, Hong Kong

Tel: +852 37469033 Fax: +852 21208765

Allied Power
We Empower Your Business



FLOW MEASUREMENT DATA LOGGING LEAK DETECTION PRESSURE MANAGEMENT